


# TOSHIBA

Leading Innovation >>>

[www.toshiba-components.com/mobile](http://www.toshiba-components.com/mobile)

## > TC358746 MIPI<sup>®</sup> CSI-2 CAMERA BRIDGE IC

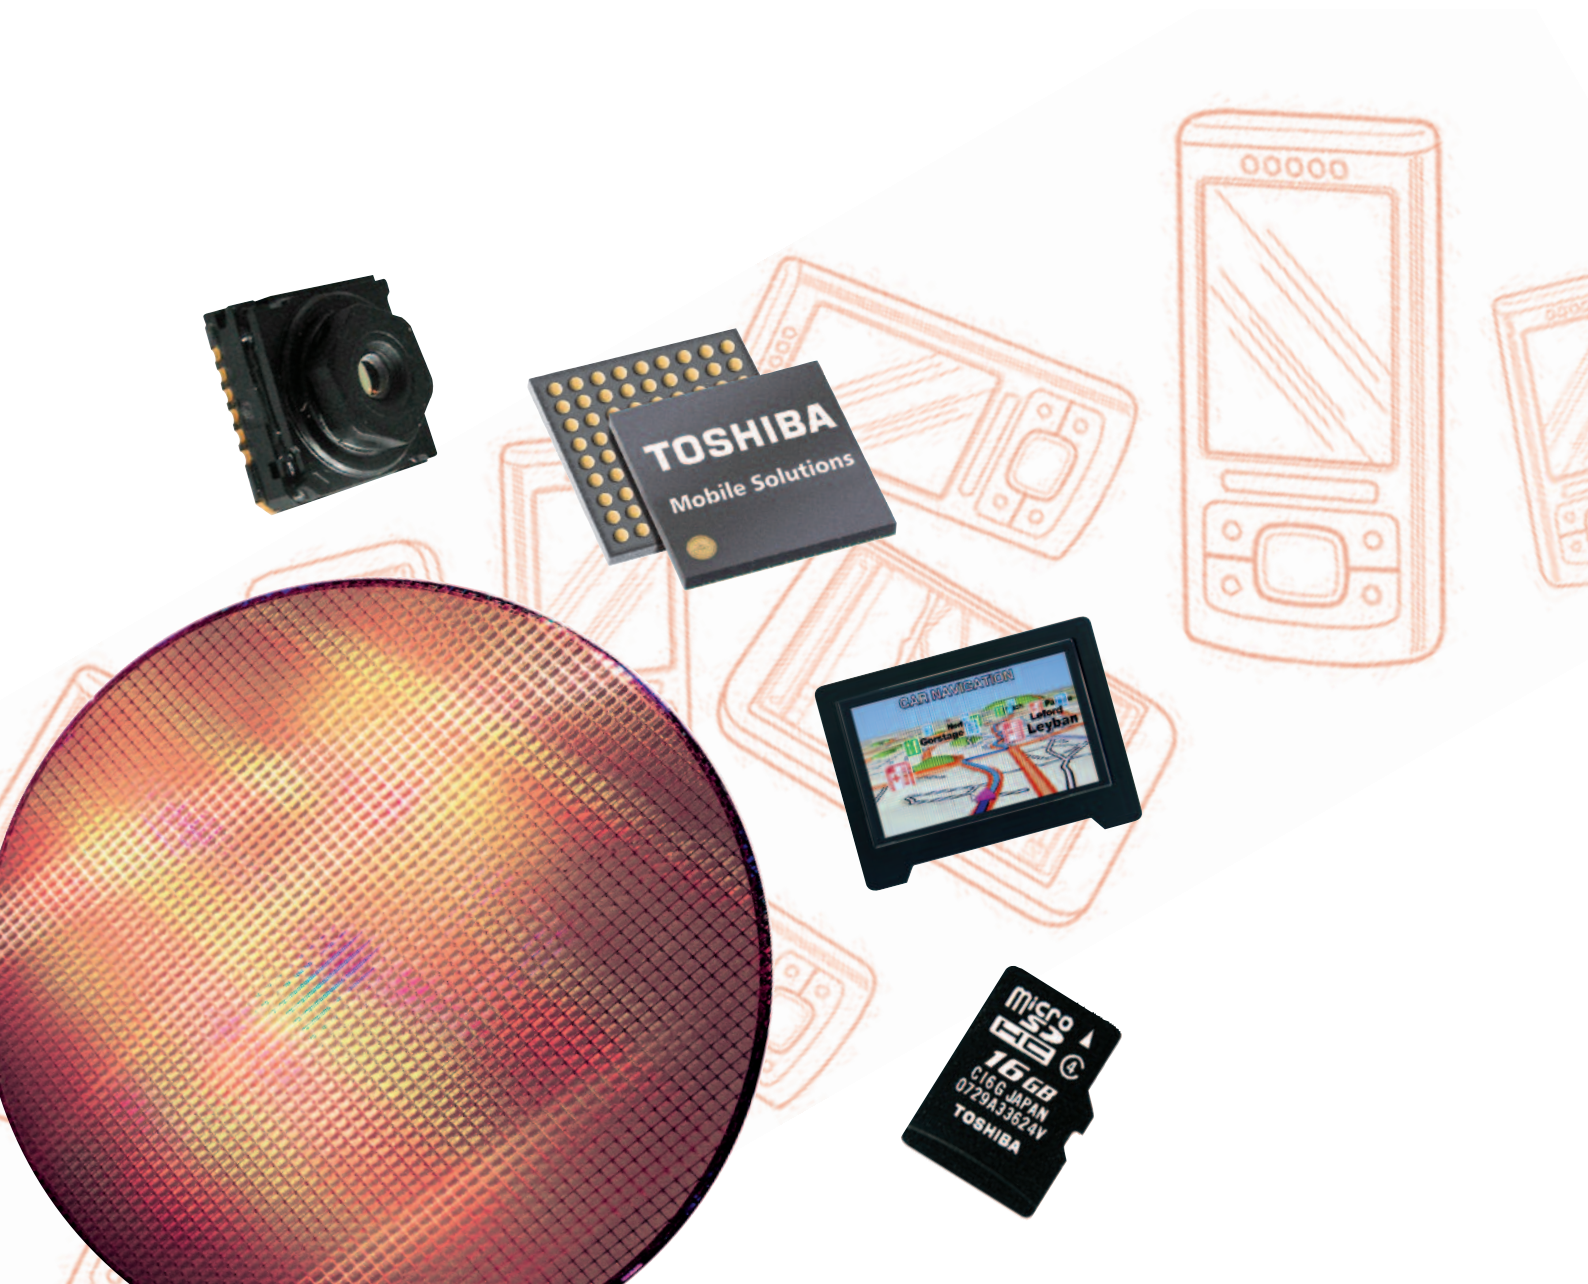

> **TC358746 MIPI® CSI-2  
CAMERA BRIDGE IC**

**HIGHLIGHTS**

- > MIPI® CSI-2 bridge for converting parallel data into MIPI CSI-2 data or MIPI CSI-2 data into parallel data for more flexible sensor selection
- > The TC358746 can be configured as CSI-2 TX with a parallel input port or CSI-2 RX with a parallel output port
- > Solutions are based on the latest versions of the industry standard MIPI CSI-2 version 1.01
- > Applies to products such as smartphones, tablets, VOIP phones and pico projectors


**DESCRIPTION**

The Toshiba TC358746 camera bridge incorporates a Mobile Industry Processor Interface (MIPI) Camera Serial Interface Type 2 (CSI-2) that functions either as a CSI-2 receiver or as a CSI-2 transmitter. The TC358746 bridge can be configured to connect to a camera with a parallel interface or with a CSI-2

interface. This enables camera selection to be based on performance, and mechanical and electrical criteria, rather than interface connectivity requirements to the Host processor. It can be configured to function as a bridge from a parallel-interface sensor to a MIPI CSI-2 Host or from a MIPI CSI-2 sensor to a parallel-interface Host. It supports several data formats such as RAW, RGB and YUV data formats.

The TC358746 camera bridge supports MIPI CSI-2 version 1.01, up to 4 data lanes with data speed of up to 1 Gbps/lane, for total bandwidth of 4 Gbps. It supports a parallel interface with performance of 100 MHz clock frequency for output mode and 154 MHz clock frequency for input mode. Additional I²C and GPIO interfaces are provided to configure the bridge registers and for control signals.

The Toshiba TC358746 camera bridge is a 72-pin device and is optimised for smartphone and handheld devices. It has a small package of 4.5 mm x 4.5 mm, 0.40 mm ball pitch, 1.0 mm height; and it is designed with clock and power management to support low-power states.

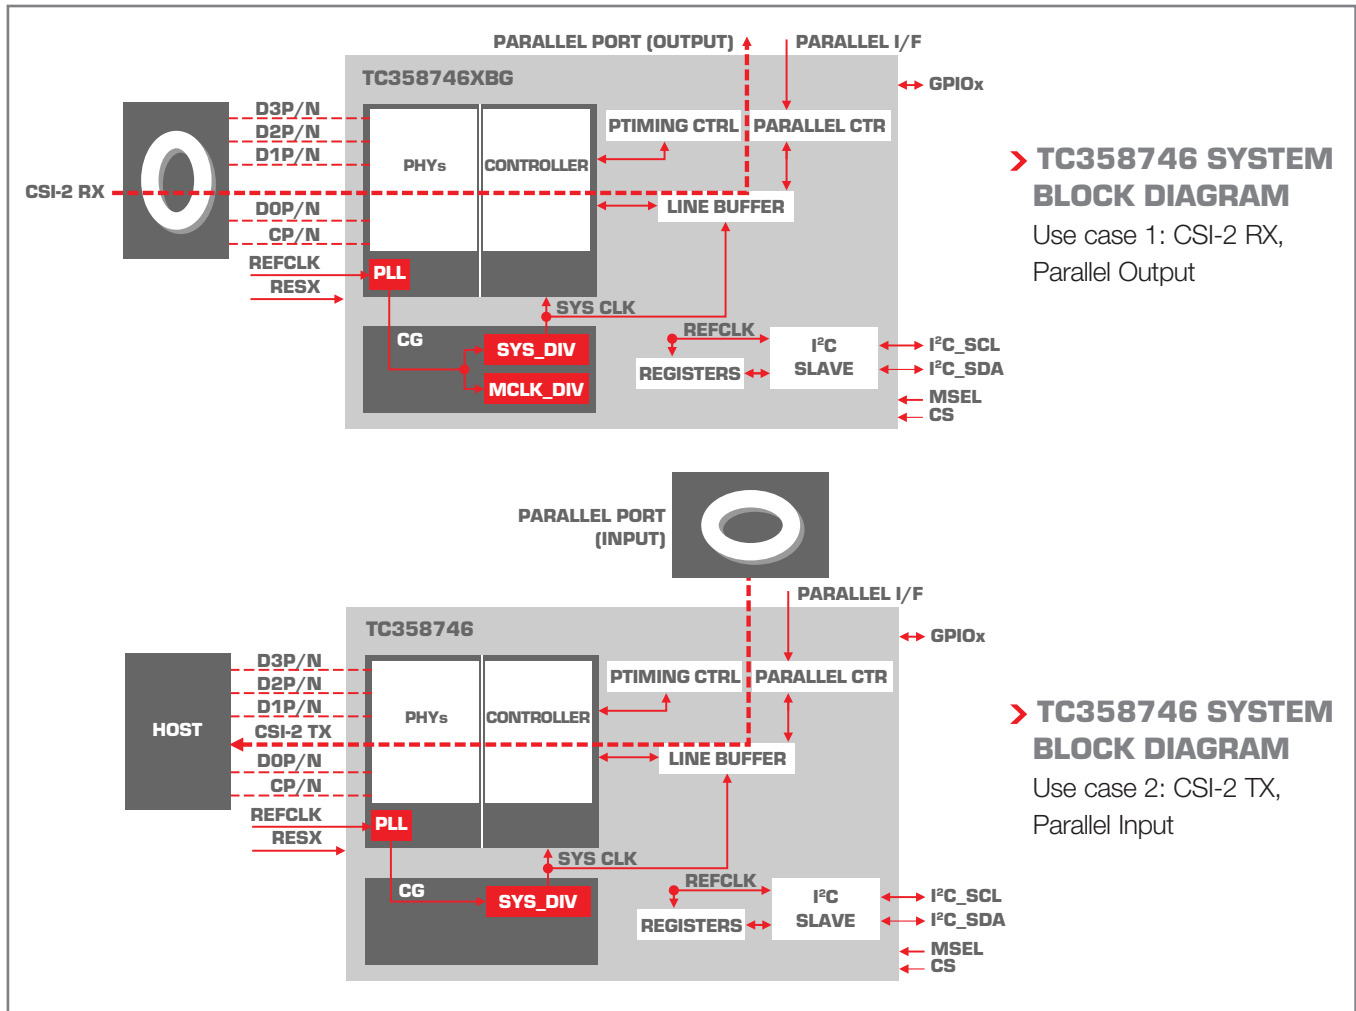

## FEATURES

### > CSI-2 TX/RX Interface

- MIPI CSI-2 compliant (Version 1.01 Revision 0.04 — 2 April 2009)
- Configurable to TX or RX controller
- Supports up to 1 Gbps per data lane
- Supports up to 4 data lanes
- Supports the following video data formats
  - For CSI RX configuration: RAW8/10/12/14, YUV422 (CCIR/ITU 8/10-bit), RGB888/666/565 and user-defined 8-bit
  - For CSI TX configuration: YUV422 (CCIR/ITU 8/10-bit), YUV444, RGB888/666/565 and RAW8/10/12/14

### > Parallel Port Interface

- Supports the following video data formats
  - 24-bit bus - un-packed format (Both input and output mode)
  - RGB888/666/565, RAW8/10/12/14 and YUV422 8-bit (on 8/16-bit data bus) and 10-bit data formats
  - YUV444 (for parallel input mode only)
  - YUV422 8-bit — ITU BT.656 and ITU BT.601 (for parallel input mode only)
- Up to 100 MHz PCLK frequency for output mode, and 154 MHz for input mode

### > I<sup>2</sup>C Slave Interface

- Support for normal (100KHz), fast mode (400 KHz) and special mode (1 MHz)
- Can be used to configure all TC358746 internal registers

### > GPIO signals

- 3 GPIO signals can be configured as control signals

### > System





- Clock and power management support to achieve low-power states
- Chip Select (CS) input signal to allow multiple TC358746 chips on the same system


### > Power supply inputs

- Core and MIPI D-PHY: 1.2V
- I/O: 1.8V – 3.3V

### > Package

- TC358746XBG: 72-pin, 4.5 mm x 4.5 mm, 0.40 mm ball pitch, 1.0 mm height

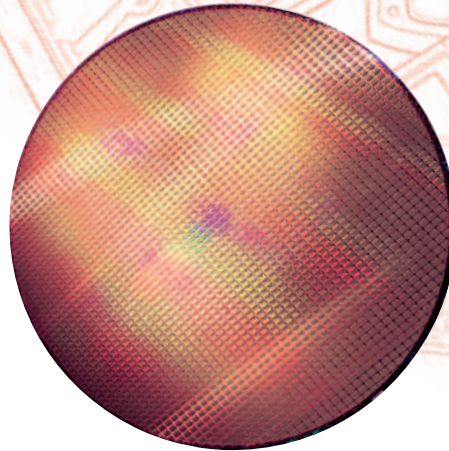

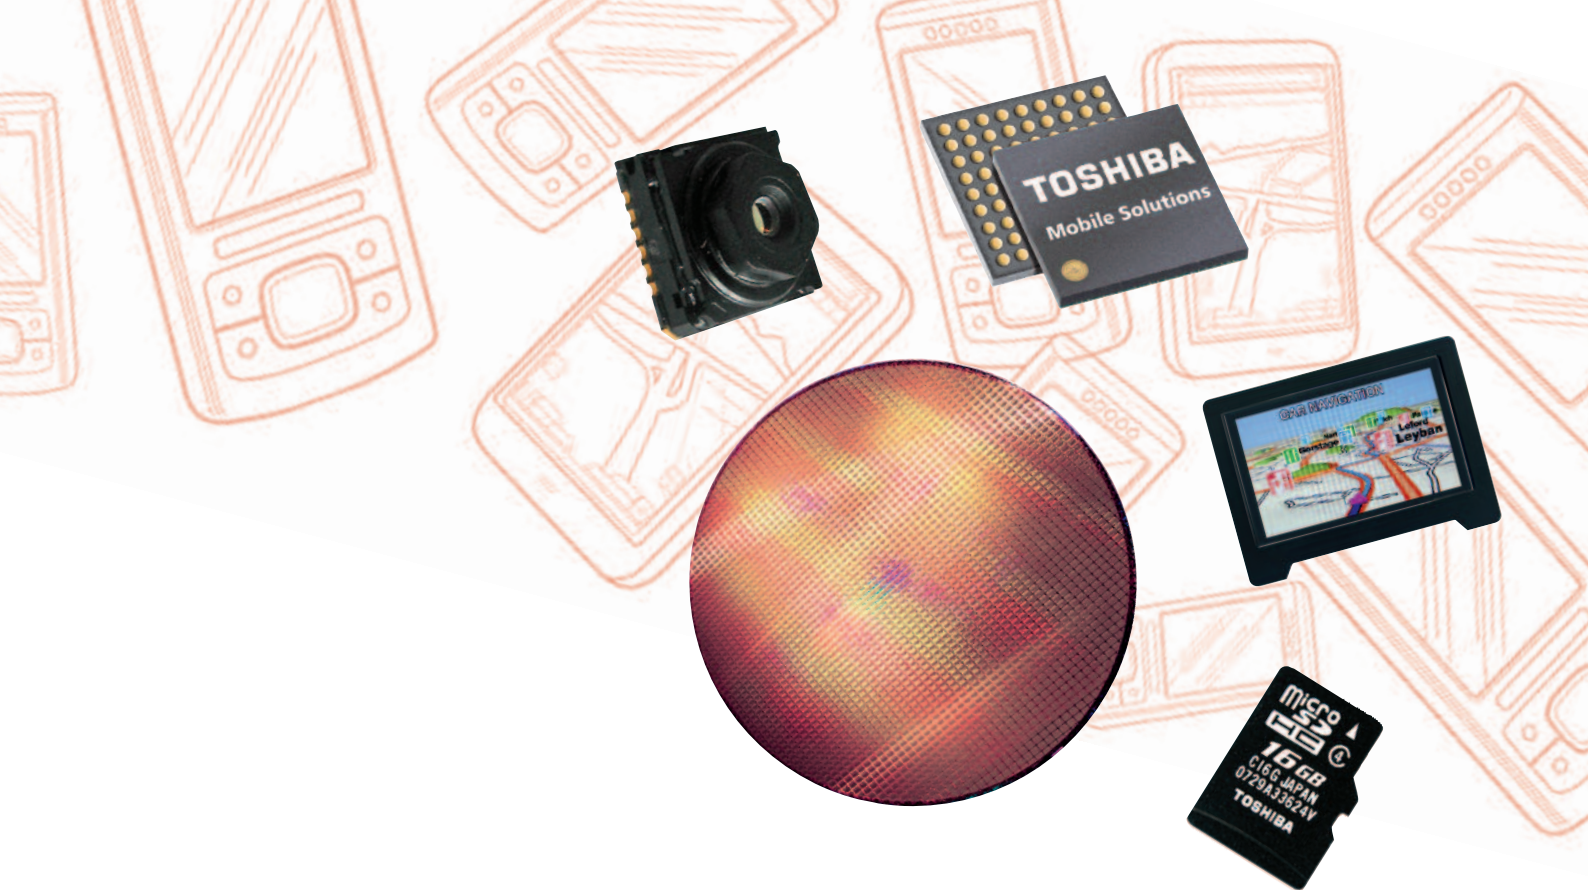

For more information visit [www.toshiba-components.com/mobile](http://www.toshiba-components.com/mobile)

## **TOSHIBA**

### **Leading Innovation >>>**

#### **GERMANY**

##### **TOSHIBA ELECTRONICS EUROPE GMBH CENTRAL EUROPEAN SALES**

Hansaallee 181, 40549 Düsseldorf  
Tel.: +49 (0211) 5296 0  
Fax.: +49 (0211) 5296 400

#### **FRANCE**

##### **TOSHIBA ELECTRONICS EUROPE GMBH, FRANCE BRANCH**

7 rue Ampère, 92804 Puteaux Cedex  
Tel.: +33 (1) 47 282 828  
Fax.: +33 (1) 47 282 389

#### **ITALY**

##### **TOSHIBA ELECTRONICS EUROPE GMBH, ITALIAN BRANCH**

Via Torri Bianche, 6  
Palazzo Tiglio - 5° piano  
20871 Vimercate - MB  
Tel.: +39 (039) 68701  
Fax.: +39 (039) 6870205

#### **UK**

##### **TOSHIBA ELECTRONICS EUROPE GMBH, UK BRANCH**

Delta House, The Crescent,  
Southwood Business Park,  
Farnborough, Hampshire GU14 0NL  
Tel: +44 (0870) 0602370  
Fax: +44 (01252) 530250

#### **SPAIN**

##### **TOSHIBA ELECTRONICS EUROPE GMBH, SPAIN BRANCH**

Parque Empresarial, San Fernando, Edificio  
Europa, 1ª Planta, E-28831 Madrid  
Tel.: +34 (91) 660 6798  
Fax.: +34 (91) 660 6799

#### **SWEDEN**

##### **TOSHIBA ELECTRONICS EUROPE GMBH, SWEDEN BRANCH**

Gustavslundsvägen 18, 5th Floor,  
S-167 15 Bromma  
Tel.: +46 (08) 704 0900  
Fax.: +46 (08) 80 8459

MIPI® is a registered trademark of the MIPI Alliance Group  
MDDI® is a trademark of the Video Electronics Standards Association (VESA)

The Toshiba products listed on this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic applications etc.). These Toshiba products are neither intended nor warranted for usage in equipment that requires extraordinary high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury („Unintended Usage“). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices etc. Unintended Usage of Toshiba products listed in this document shall be made at the customer's risk. The products described in this document may include products subject to the foreign exchange and foreign trade laws.

The information contained in this document is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA for any infringements of patents or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent right of TOSHIBA or others.

Copyright and published by Toshiba Electronics Europe GmbH, Hansaallee 181, 40546 Düsseldorf, Handelsregister Düsseldorf HRB 22487, Geschäftsführ Horoshi Otsuka, Amtsgericht Düsseldorf

Product or company names mentioned here are Trademarks of their respective owners. The information contained here is subject to change without notice.

Document Number: TEE/E:00:000